



AVN-E04-2P04W65

CE | FCC


6 Port 10/100M Smart PoE Switch

OVERVIEW

- 10/100M access, Dual RJ45 port uplink
- Smart PoE power supply
- Innovative function
- Stable and reliable, Easy to use
- IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3x
- 4x 10/100Base-TX RJ45 ports
- 2x 10/100Base-TX uplink RJ45 ports
- Reliable Power Adapter supply power for both network switch and PoE
- Max Power per Port: 30W, PoE+

DIMENSIONS

Unit : inch(mm)

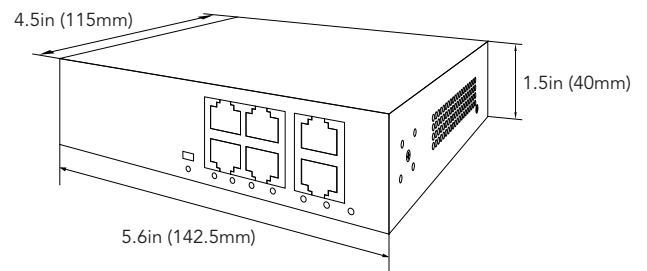

OPTIONAL ACCESSORIES

SPECIFICATIONS

INTERFACE CHARACTERISTICS	
Fixed Port	4*10/100Base-TX PoE ports (Data /Power) 2*10/100Base-TX uplink RJ45 ports (Data)
Ethernet Port	Port 1- 6 can support 10/100BaseTX auto-sensing, full / half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤250 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters)
Functional Switch	250m: long-distance and VLAN isolation (Default: off, Use: on), After opening, port 1-4 support 10M/250m transmission
CHIP PARAMETER	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	1.6Gbps
Forwarding Rate@64byte	0.89Mpps
MAC	1K
Buffer Memory	768K
Jumbo Frame	1536byte
LED Indicator	Power: PWR (Green), Network/ PoE: 1-6/ 1-10: (Green), Functional switch: 100m/ 250m (Green)
PoE & POWER SUPPLY	
PoE Port	Port 1 to 4
Power Supply Pin	1/2(+) 3/6(-)
Max Power Per Port	30W, PoE+
Total PWR / Input Voltage	65W (AC100-240V)
Power Consumption	Standby<3W, Full load<65W
Power Supply	Built-in power supply, AC100-240V 50-60Hz, 1.0A
PHYSICAL PARAMETER	
Operation TEMP / Humidity	-4~+131°F (-20~+55°C), 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+176°F (-40~+80°C), 5%~95% RH Non condensing
Dimension (L*W*H)	5.6 x 4.5 x 1.5in (142.5 x 115 x 40mm)
Net /Gross Weight	1.2lb / 1.7lb (0.55kg / 0.8kg)
Installation	Desktop, Wall mount
CERTIFICATION & WARRANTY	
Lightning Protection	4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS